

Job Name: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_ GPM @ \_\_\_\_\_ PSI, \_\_\_\_\_ Volts, 1Ø, 60~

Date: \_\_\_\_\_  
 Designer: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Distributor: \_\_\_\_\_

## CondoFlo Booster Model 2SA-19V

### Standard Features:

- ¾ Hp close coupled pump and motor
  - Stainless steel pump construction
  - Mechanical seal
  - Built-in overload protection (115/230V, 1Ø, 60Hz)
  - 3600RPM, ODP motor
- Pre-pressurized bladder tank
  - 19 gallon capacity
  - Vertical construction
  - UL classified to ANSI/NSF Standard 61
  - One piece seamless water cell of FDA listed material
  - 100psig rating
- Construction Details
  - Type L copper piping with 1" FPT discharge connection and 1-1/4" FPT suction connection
  - Inline discharge silent check valve (Suction check valve optional)
  - 2-1/2" discharge pressure gauge
  - Adjustable control pressure switch (30-50psig range)
- Factory prefabricated
  - Single source responsibility
  - Packaged performance


PSI Boost	36	34	32	30	28	26	23	20
GPM	0	5	10	15	20	25	30	35

Model: 2SA19V

### NOTES:

1. Maximum working pressure is 100psig
2. Please specify voltage

*Meets plumbing codes & standards*

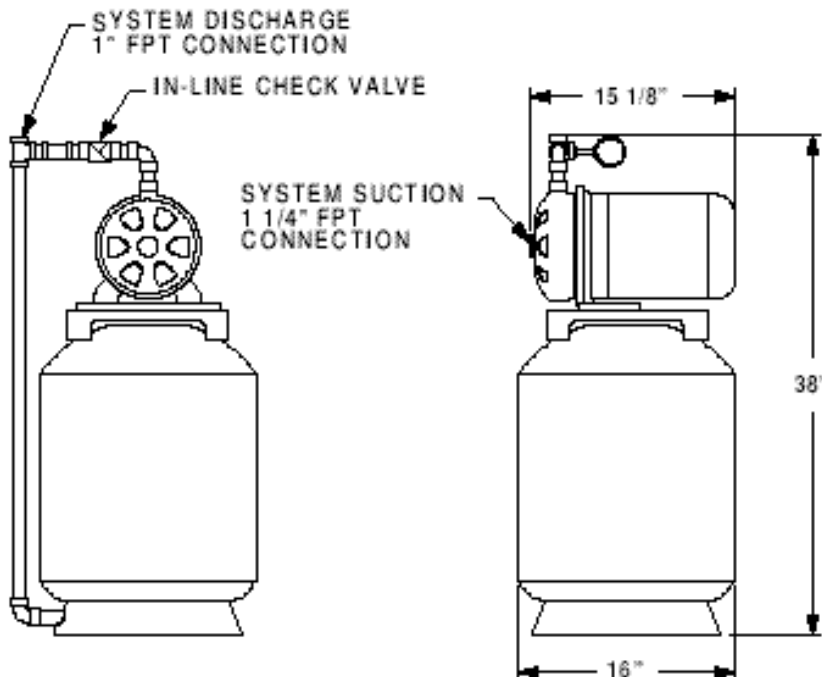

*Standard performance  
 Inquire about others*