

Job Name: _____

 _____ GPM @ _____ PSI, _____ Volts, 1Ø, 60~

Date: _____
 Designer: _____
 Contractor: _____
 Distributor: _____

CondoFlo Booster

Standard Features:

- ¾ Hp close coupled pump and motor
 - Stainless steel pump construction
 - Mechanical seal
 - Built-in overload protection (115/230V, 1Ø, 60Hz)
 - 3600RPM, ODP motor
- Pre-pressurized bladder tank
 - 14 gallon capacity
 - Vertical construction
 - UL classified to ANSI/NSF Standard 61
 - One piece seamless water cell of FDA listed material
 - 100psig rating
- Construction Details
 - Type L copper piping with 1" FPT discharge connection and 1-1/4" FPT suction connection
 - Inline discharge silent check valve (*Suction check valve optional*)
 - 2-1/2" discharge pressure gauge
 - Adjustable control pressure switch (30-50psig range)
 - Optional ¾" discharge relief valve*
- Factory prefabricated
 - Single source responsibility
 - Packaged performance


PSI Boost	36	34	32	30	28	26	23	20
GPM	0	5	10	15	20	25	30	35

Model: 2SA14V

NOTES:

1. Maximum working pressure is 100psig
2. Please specify voltage

Meets plumbing codes & standards

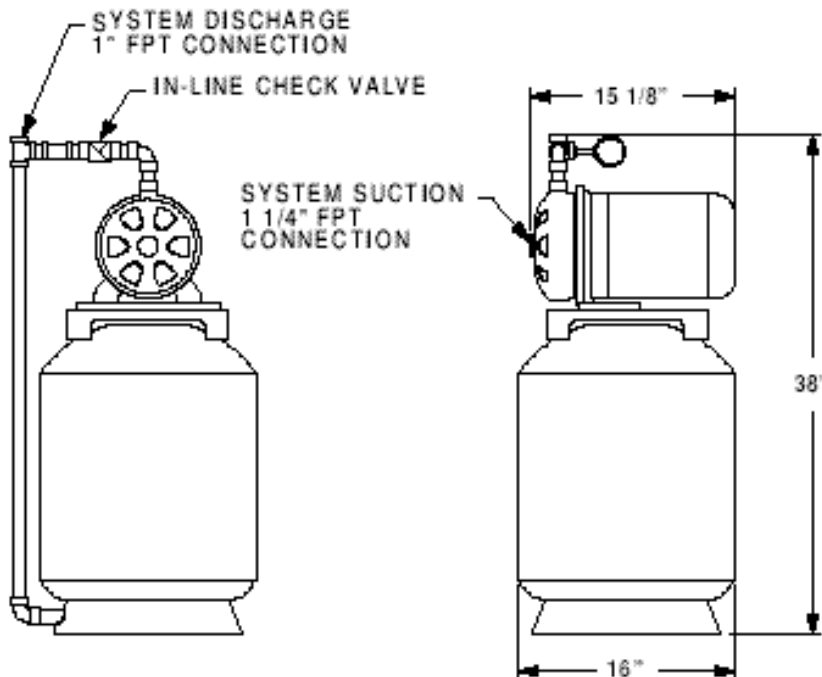

*Standard performance
 Inquire about others*